
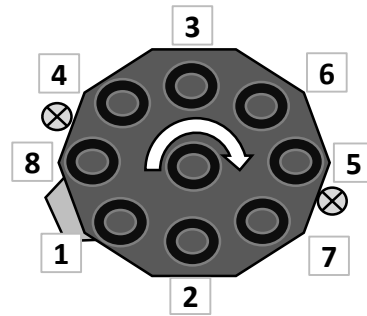
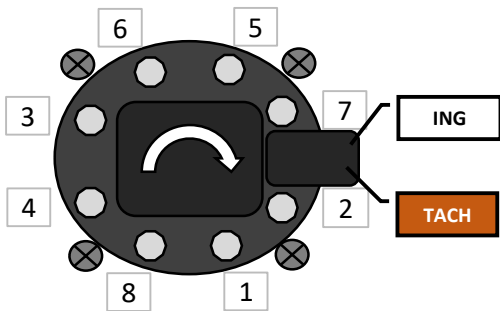


SMALL BLOCK CHEVROLET

Firing Order-Spark Plug Gap-Torque-Wire Length

1 8 4 3 6 5 7 2

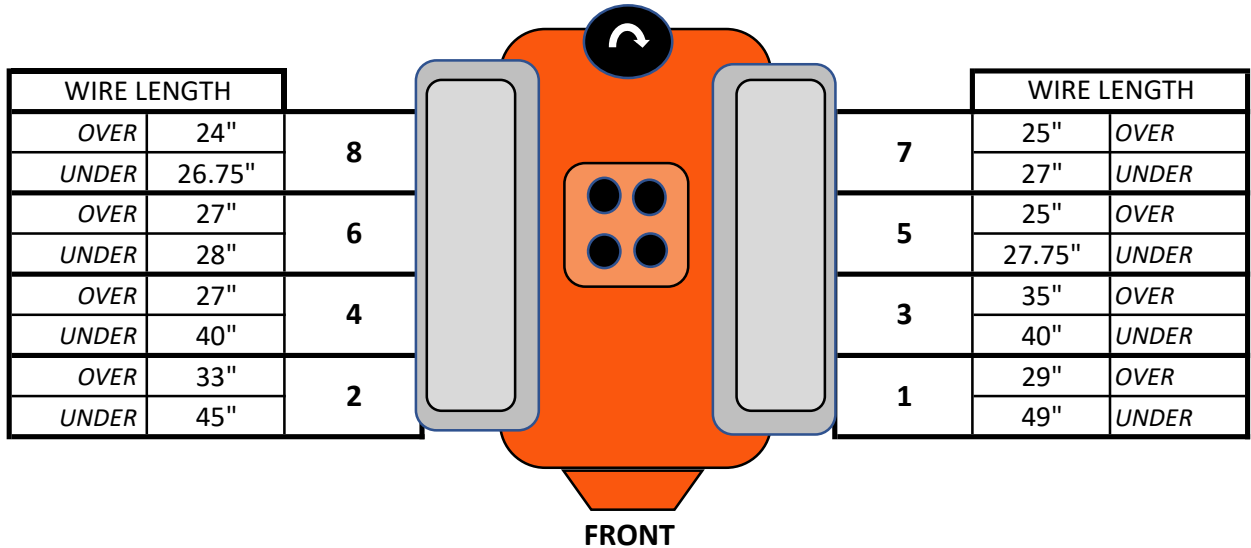

SPARK PLUG GAP
.045"

SPARK PLUG GAP
.035"

SPARK PLUG TORQUE: 20 ft-lbs

SPARK PLUG WIRE LENGTH								
	1	2	3	4	5	6	7	8
OVC POINT	29	33	35	27	25	27	25	24
OVC HEI	29	33	35	27	25	27	25	24
UEM POINT	45	45	40	40	27.75	28	27	26.75
UEM HEI	45	45	40	40	27.75	28	27	26.75